


# VT-4B5

UL Approval: E214381    Version: B8

## Aluminum Base Laminate / RCF (Resin Coated Film)

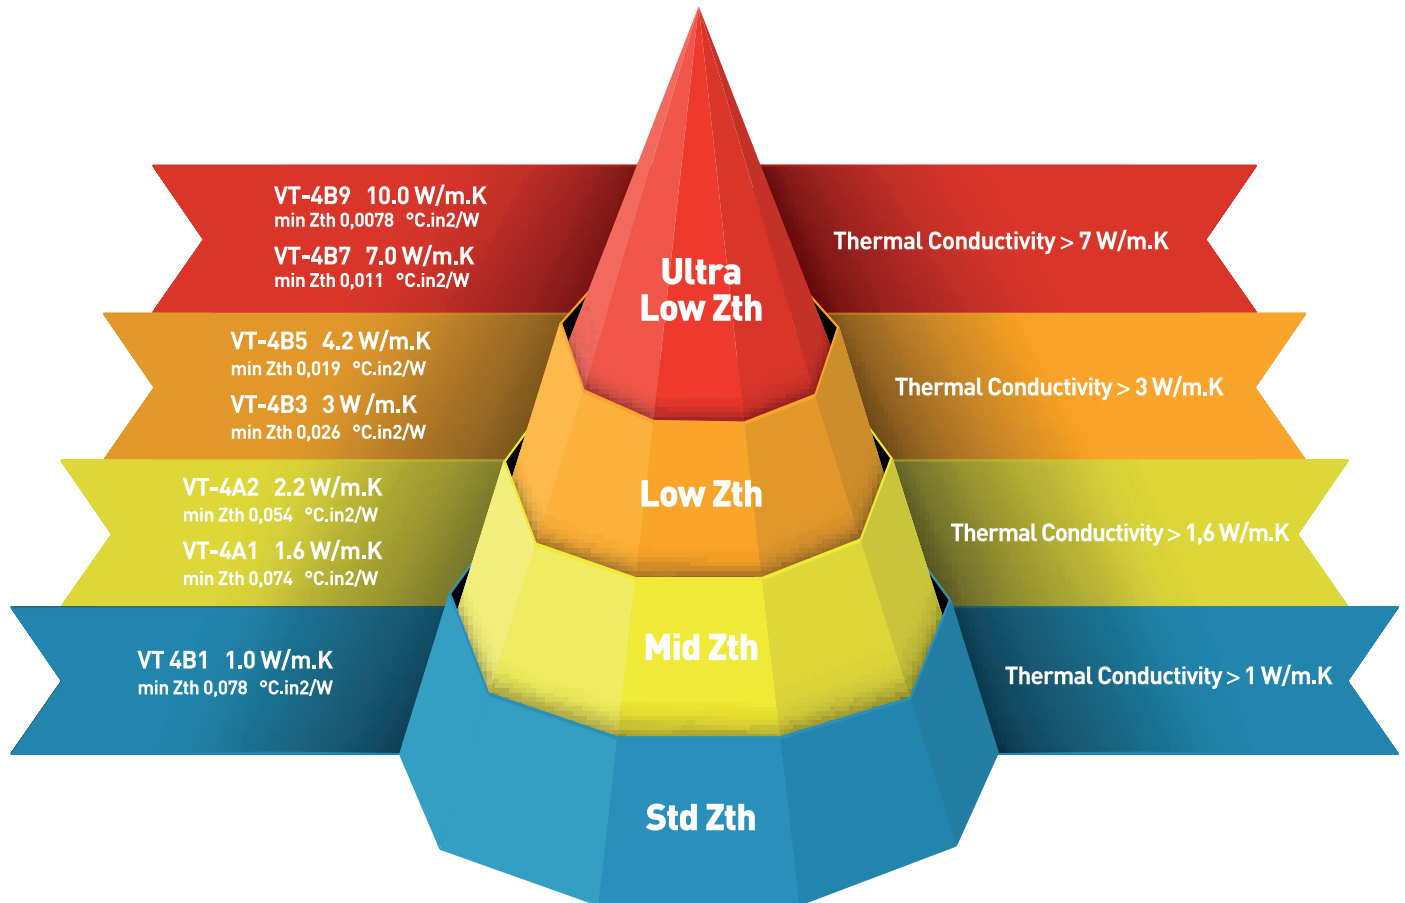

### CORPORATE HEADQUARTERS

Ventec Electronics Co. Ltd.  
308 TaiShan Rd,  
New District Suzhou,  
Jiangsu, P.R. China 215129  
T: +86 512-68091810  
Email: sales@ventec.com.cn

### EMEA REGIONAL HEADQUARTERS

Ventec Europe  
Unit 1 Trojan Business Centre,  
Tachbrook Park Estate,  
Leamington-Spa, CV34 6RH, UK  
T: +44 1926-889822  
Email: sales@ventec-europe.com

### AMERICAS REGIONAL HEADQUARTERS

Ventec USA  
21 Water Street, Amesbury,  
Massachusetts, MA 01913,  
United States of America  
T: +1 978-5219700  
Email: saleseast@ventec-usa.com

[www.ventecclaminates.com](http://www.ventecclaminates.com)

# VT-4B5

UL Approval: E214381    Version: B8

## Aluminum Base Laminate / RCF (Resin Coated Film)

### General Information

- > Thermal conductivity -- 4.2W/mK
- > Ceramic Filled
- > Halogen Free
- > Flammability UL94 V0
- > MOT 130°C

### Application



- > Ultra bright LED Substrate
- > Power Conversion
- > PDP, LED, Regulator for TV
- > Monitor Drives
- > Rectifier, Power Supply

### Storage Condition & Shelf Life

		RCF		Laminate
Storage Condition	Temperature	< 23°C [73°F]	< 5°C [41°F]	Room
	Relative humidity	< 55%	/	/
Shelf Life		2 months	4 months	24 months

The RCC exceeding shelf life should be retested.

### Designation of IMS Laminate

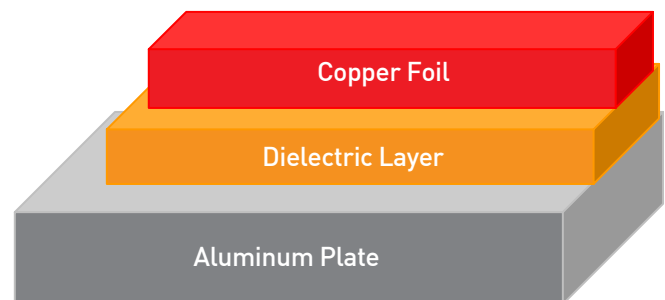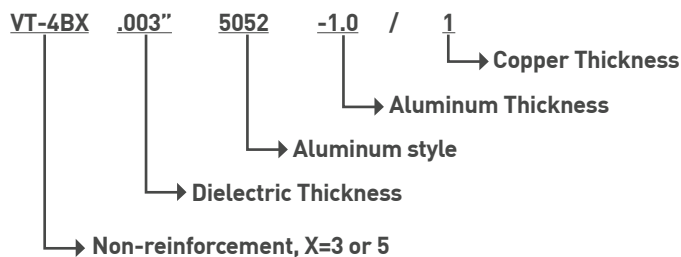

#### CORPORATE HEADQUARTERS

Ventec Electronics Co. Ltd.  
308 TaiShan Rd,  
New District Suzhou,  
Jiangsu, P.R. China 215129  
T: +86 512-68091810  
Email: sales@ventec.com.cn

#### EMEA REGIONAL HEADQUARTERS

Ventec Europe  
Unit 1 Trojan Business Centre,  
Tachbrook Park Estate,  
Leamington-Spa, CV34 6RH, UK  
T: +44 1926-889822  
Email: sales@ventec-europe.com

#### AMERICAS REGIONAL HEADQUARTERS

Ventec USA  
21 Water Street, Amesbury,  
Massachusetts, MA 01913,  
United States of America  
T: +1 978-5219700  
Email: saleseast@ventec-usa.com

www.ventec laminates.com

# VT-4B5

UL Approval: E214381    Version: B8

## Aluminum Base Laminate / RCF (Resin Coated Film)

### Laminate Properties

Item	Test Method (IPC-TM-650)	Unit	VT-4B5					
			50um	75um	100um	150um	200um	
Thermal Conductivity	ISO22007-2	W/m*K	4.2					
Thermal Impedance	ISO22007-2	°C*in <sup>2</sup> /W	0.020	0.029	0.038	0.058	0.076	
Tg	DSC	2.4.25	°C					
Td	TGA	ASTM D3850	°C					
Thermal Stress	Solder Dip @ 288°C	2.4.13.1	Minute					
Hi-Pot Withstand	DC	2.5.7.2	V	2000	3000	4000	6000	9000
Breakdown Voltage	AC	2.5.6.3	V	4000	7000	8000	10000	12000
Dk @ 1MHz	C-24 /23 / 50	2.5.5.3	—					
Df @ 1MHz	C-24/ 23 / 50	2.5.5.3	—					
Volume Resistance	After Moisture	2.5.17.1	MΩ-cm	5.0E+8				
	E-24/125			3.0E+7				
Surface Resistance	After Moisture	2.5.17.1	MΩ	2.0E+7				
	E-24/125			5.0E+6				
Peel strength (1oz)	As Received	2.4.8	Lb/in	7				
CTI	As Received	ASTM D3638	V	600				
Flammability	As Received	UL 94	Rating	V0				
RTI	Electric	UL 94	°C	130				
	Mechanical	UL 94	°C	130				

All test data provided are typical values and not intended to be specification values.

#### CORPORATE HEADQUARTERS

Ventec Electronics Co. Ltd.  
 308 TaiShan Rd,  
 New District Suzhou,  
 Jiangsu, P.R. China 215129  
 T: +86 512-68091810  
 Email: sales@ventec.com.cn

#### EMEA REGIONAL HEADQUARTERS

Ventec Europe  
 Unit 1 Trojan Business Centre,  
 Tachbrook Park Estate,  
 Leamington-Spa, CV34 6RH, UK  
 T: +44 1926-889822  
 Email: sales@ventec-europe.com

#### AMERICAS REGIONAL HEADQUARTERS

Ventec USA  
 21 Water Street, Amesbury,  
 Massachusetts, MA 01913,  
 United States of America  
 T: +1 978-5219700  
 Email: saleseast@ventec-usa.com

www.ventec laminates.com

# VT-4B5

UL Approval: E214381    Version: B8

## Aluminum Base Laminate / RCF (Resin Coated Film)

### Availability

### Laminate

Item	Availability	
Dielectric	.002" (50um), .003" (75um), .004" (100um), .006" (150um), .008" (200um)	
Standard Size	Imperial	18*24", 20"*24", 21"*24", 18"*48", 20"*48", 21"*48"
	Metric	457*610, 508*610, 533*610, 457*1220, 508*1220, 533*1220
Copper Weight	1/3oz, Hoz, 1oz, 2oz, 3oz, 4oz, 6oz	
Aluminum Thickness	0.6mm, 0.8mm, 1.0mm, 1.2mm, 1.5mm, 2.0mm, 3.0mm	
Aluminum Alloy	1100, 5052, or as required	

### RCF

Item	Availability
Dielectric	.002" (50um)
Flow-in	10~50mil
Standard Size	Width: 18.7" (476mm), 20.6" (524mm), 21.6" (549mm) Length: Max 49.06" (1246mm)
PET Film	75um

### Protective Film for Aluminium Plate

Type	Material	Max Operation Temperature
Standard	PET	170 °C
High Temperature	Polyimide	270 °C

#### CORPORATE HEADQUARTERS

Ventec Electronics Co. Ltd.  
308 TaiShan Rd,  
New District Suzhou,  
Jiangsu, P.R. China 215129  
T: +86 512-68091810  
Email: sales@ventec.com.cn

#### EMEA REGIONAL HEADQUARTERS

Ventec Europe  
Unit 1 Trojan Business Centre,  
Tachbrook Park Estate,  
Leamington-Spa, CV34 6RH, UK  
T: +44 1926-889822  
Email: sales@ventec-europe.com

#### AMERICAS REGIONAL HEADQUARTERS

Ventec USA  
21 Water Street, Amesbury,  
Massachusetts, MA 01913,  
United States of America  
T: +1 978-5219700  
Email: saleseast@ventec-usa.com

www.ventec laminates.com